


Handheld Shower Head

Installation Instructions

Tools needed for installation: Read instructions before installation! Depending on your installation, you may require the following supplies: wrench or pliers, steel wool, rags, pipe compound or Teflon tape, shower arm and flange (if existing shower arm has a ball at the end), brack, hose. When using wrench or pliers, always protect finishes by wrapping parts with a cloth.

1. Unscrew old shower head (turn counter-clockwise), clean the hose threads.
2. Apply Teflon thread sealing tape to the hose threads (small roll enclosed)
3. Screw your wand onto the hose. **Do not overtighten.**
4. Run water to test for leaks.
5. Turn face to adjust from Massage, to Combo, to Gentle Rain spray patterns.
6. Place handheld shower unit into bracket. Adjust bracket to desired position.

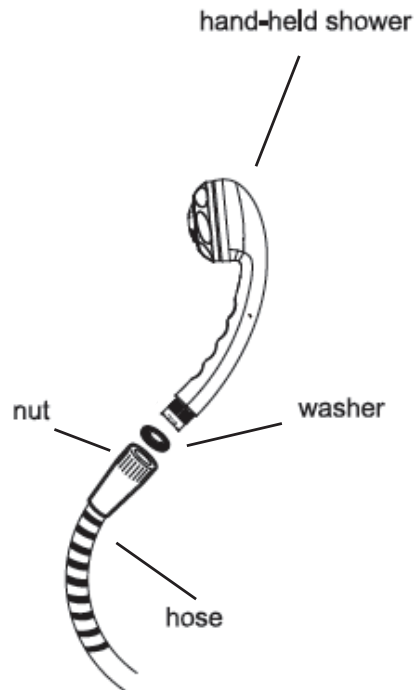

Features:

- Three Spray setting: Saturating Spray, Massage Spray and Combo.
- Pressure compensating assures a steady flow rate

LIMITED WARRANTY: This product is warranted to be free from defects in workmanship and material for 1 year. If it fails to do so, Greenlite™ will send you, at its election, a replacement product or refund your original purchase price upon receipt of the returned fixture, register receipt and proof of purchase. Please call (844) 695-9090 to find out how to return the product. Do not return this product to the retailer. This limited warranty does not cover product subject to accident, neglect, abuse, misuse or acts of God. Replacement or refund is your sole remedy.

For all enquiries, please contact our customer service team at info@greenliteusa.com or 1-844-695-9090 from 9:00 AM to 5:00 PM EST