



Model NO. 11W/RETROFIT/SMART1

5/6" SMART RETROFIT KIT

The product package includes the following components:

- ✓ LED Retrofit Luminaire Conversion Kit with medium base adapter
- ✓ Installation Instruction Sheet
- ✓ Field Applied Label

This product is intended to be used in dry, damp or wet locations. This retrofit cannot be dimmed with dimmer switches.

WARNING - Risk of fire or electric shock. LED Retrofit Kit installation requires knowledge of luminaires electrical systems. If not qualified, do not attempt installation. Contact a qualified electrician. Install this kit only in luminaires that have the construction features and dimensions shown in the photographs and/or drawings. To prevent wiring damage or abrasion, do not expose wiring to edges of sheet metal or other sharp objects. Do not make or alter any open holes in an enclosure of wiring or electrical components during kit installation.

- SUITABLE FOR TYPE IC OR NON-IC LUMINAIRES, SUITABLE FOR AIRTIGHT HOUSINGS
- MIN. LAMP COMPARTMENT DIMENSIONS 5.3" (DIA) x 7.5" (H)
- Not for use in shallow housings.

THIS DEVICE IS NOT INTENDED FOR USE WITH EMERGENCY EXITS.
These products are Classified as to FIRE and SHOCK hazards only.

Installation into Existing Recessed Incandescent Fixture:

For use with 5" or 6" recessed housings (housing is not included)

LED recessed trim will retrofit into select existing 5" or 6" nominal incandescent housings.

Step 1: Turn OFF power at switch and fusebox or circuit breaker.

Step 2: Remove existing trim installed in recessed housing (if necessary).

Step 3: If applicable, slide lampholder bracket to its upward maximum position. If the lampholder bracket is less than 4.5" from the bottom edge of the fixture enclosure, the lampholder bracket must be removed.

Step 4: If necessary, remove the lampholder mounting bracket (see FIG. 2) then attach the provided label to the existing luminaire.

Step 5: Install adapter into socket (see FIG. 3).

Step 6: Connect the orange connectors together (see FIG. 4A).

Step 7: Insert torsion springs into fixture housing brackets (see FIG. 5).

Step 8: Gently push up trim and torsion springs so they begin to expand and lift trim in place (see FIG. 6).

FIG. 1A




FIG. 2


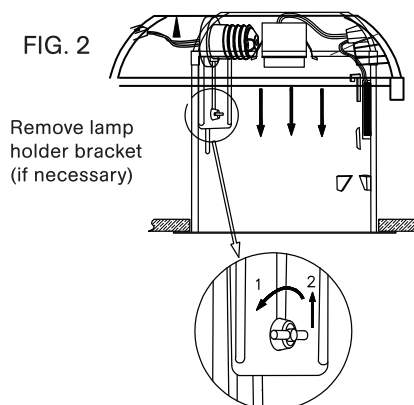


FIG. 3



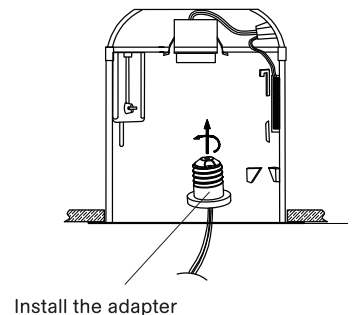

Model NO. 11W/RETROFIT/SMART1

5/6" SMART RETROFIT KIT

FIG. 4A

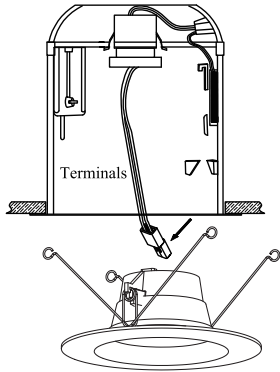


FIG. 5


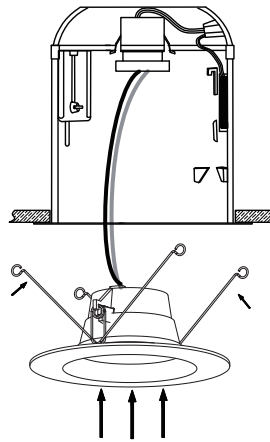


FIG. 6

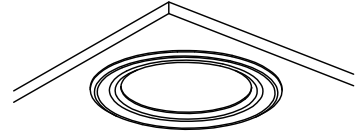

Installation into Existing Recessed LED Fixture with compatible orange connectors LED recessed trim will retrofit into select existing 5" or 6" incandescent housings.

- Step 1:** Turn OFF power at switch and fusebox or circuit breaker.
- Step 2:** Remove existing trim installed in recessed housing (if necessary).
- Step 3:** Discard medium base adapter (see FIG. 1A).
- Step 4:** Connect the orange connectors together (see FIG. 2B).
- Step 5:** Insert torsion springs into fixture housing brackets (see FIG. 2A).
- Step 6:** Gently push up trim and torsion springs so they begin to expand and lift trim in place (see FIG. 3).

FIG. 1A




FIG. 1B

Diagram of recessed fixture




FIG. 2A



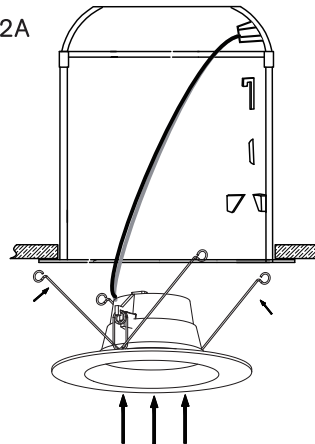


FIG. 2B

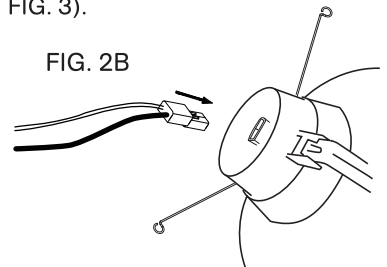

Connect the orange connectors

FIG. 3

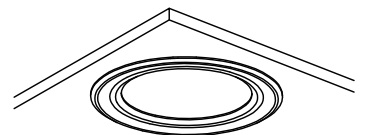

Connecting Your Bulb(s)

1. Download the Greenlite App from the Android Google™ Store or App Store.
2. Follow app's instructions to register a new account.
3. Install and power fixture.
4. Tap "Add Device" in Greenlite App.
5. Confirm fixture is blinking rapidly. If the fixture is not blinking, follow app's instructions on "How to make fixture blink rapidly".
6. Once fixture is blinking, tap "Confirm" on your device.
7. Enter your Wi-Fi password to connect fixture.
8. Fixture will begin to pair with Greenlite App.
9. After successful pairing, give fixture a name.
10. Fixture is ready to be controlled with the Greenlite App.

LIMITED WARRANTY: This fixture is warranted to be free from defects in workmanship and material for 2 years. If it fails to do so, Greenlite™ will send you, at its election, a replacement fixture or refund your original purchase price upon receipt of the returned fixture, register receipt and proof of purchase. Please call (800) 930-2111 to find out how to return the fixture. Do not return this fixture to the retailer. This limited warranty does not cover fixtures subject to accident, neglect, abuse, misuse or acts of God. Replacement or refund is your sole remedy.

For all enquiries, please contact our customer service team at info@greenliteusa.com or 1-800-930-2111 from 9:00 AM to 5:00 PM EST.