


## Fixed Shower Head

### Installation Instructions

1. Unscrew old shower head (turn counter-clockwise), clean shower arm threads.
2. Apply Teflon thread sealing tape to the shower arm threads (small roll enclosed)
3. Hand-tighten shower head on to shower arm. **Do not overtighten.**
4. Run water to test for leaks.
5. Turn face to adjust from Massage, to Combo, to Gentle Rain spray patterns.

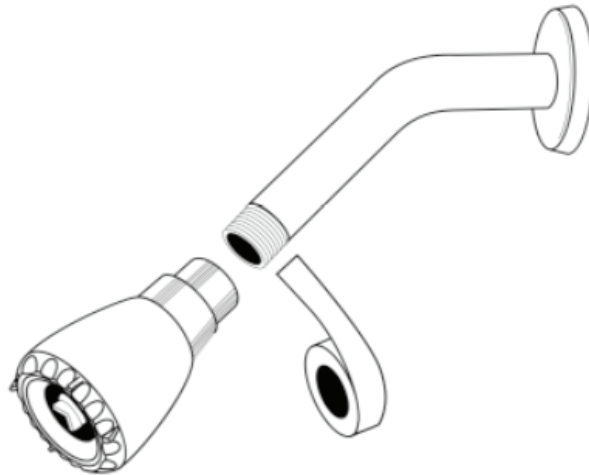

#### Features:

- Three Spray setting: Saturating Spray, Massage Spray and Combo.
- Pressure compensating assures a steady flow rate
- Corrosion - resistant, ABS body with plastic ball joint.

**LIMITED WARRANTY:** This product is warranted to be free from defects in workmanship and material for 1 year. If it fails to do so, Greenlite™ will send you, at its election, a replacement product or refund your original purchase price upon receipt of the returned fixture, register receipt and proof of purchase. Please call (844) 695-9090 to find out how to return the product. Do not return this product to the retailer. This limited warranty does not cover product subject to accident, neglect, abuse, misuse or acts of God. Replacement or refund is your sole remedy.

For all enquiries, please contact our customer service team at [info@greenliteusa.com](mailto:info@greenliteusa.com) or 1-844-695-9090 from 9:00 AM to 5:00 PM EST