



# Energy Conservation - TIER 1 ADVANCED POWER STRIP – 7 OUTLETS


Save energy and protect your devices with this smart power strip. Automatically powers off unused devices and provides surge protection.




## PRODUCT SPECIFICATIONS

<b>Voltage</b>	125 VAC
<b>VPR Rating</b>	VPR 700V (L-N) 900V (L-G, N-G)
<b>Power Rating</b>	15A 125VAC 60Hz
<b>Surge Protection</b>	1440 Joules, 1875W
<b>Input Plug Type</b>	Type 3 SPD
<b>On/off Resettable Circuit Break</b>	Rated 15A
<b>Max Total Spike Voltage</b>	6000V
<b>Max Total Spike Current</b>	3000A
<b>Clamping Response Time</b>	< 1ns
<b>Standby Power</b>	< 1W
<b>Minimum Control Outlet Switched On Power</b>	10W±2W
<b>Operating Temperature</b>	-4°F ~ 113°F
<b>Cable</b>	14AWG 36 inches
<b>Weight</b>	500g
<b>Certifications</b>	FCC, ETL, UL 1363 + UL 1449
<b>Warranty</b>	2 Years

## DETAILED DIMENSIONS

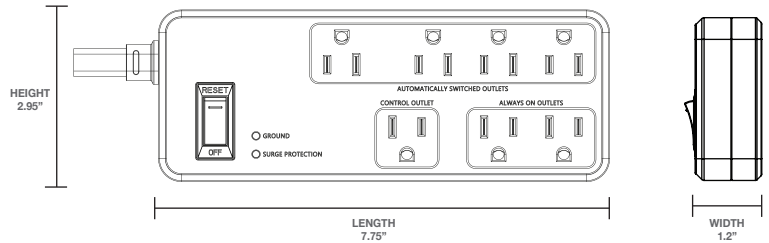

## FEATURES

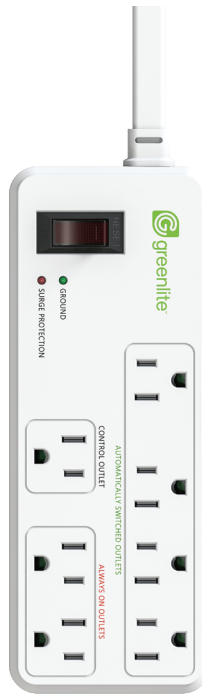


- 1440 Joules
- Reduces standby power
- Compatible with >99% TVs
- Resettable circuit breaker
- 3 FT. Power cord
- Space-saving angled plug

**WARNING:** For indoor use in dry locations only. Not intended for use with aquarium equipment, microwaves, electric kettles, refrigerators, freezers, air conditioners, electric heaters, or other high-power appliances. Do not use with power drills, bench saws, or other power tools. The combined load used on all outlets at the same time must not exceed 1800 watts. In case of overloading, the circuit breaker will safely shut off all power. Eliminate the overload, then reset by pressing the circuit breaker switch. **CAUTION: RISK OF ELECTRIC SHOCK. DO NOT PLUG INTO ANOTHER RELOCATABLE POWER STRIP OR AN EXTENSION CORD.**

### 7 OUTLETS

#### 2 X ALWAYS-ON OUTLETS



#### 4 X SWITCHED OUTLETS



#### 1X CONTROL OUTLET



## MODEL INFORMATION

MODEL	CASE QTY
APS/T107M1S4/I03	36

1-877-255-0004 | info@greenliteusa.com  
[www.greenliteusa.com](http://www.greenliteusa.com)

V1-021225

