


## Fixed Showerhead

### Installation Instructions

1. Unscrew old showerhead (turn counter-clockwise), clean shower arm threads.
2. Apply the included Teflon thread sealing tape (small roll enclosed) to the shower arm threads.
3. Hand-tighten the showerhead on the shower arm. Do not overtighten.
4. Run water to test for leaks.
5. Turn the showerhead face to adjust the setting between: full, massage, combo.

#### Features:

- Three spray settings: full, massage, combo.
- Pressure compensating assures a steady flow rate.
- Corrosion-resistant, ABS body with plastic ball joint.

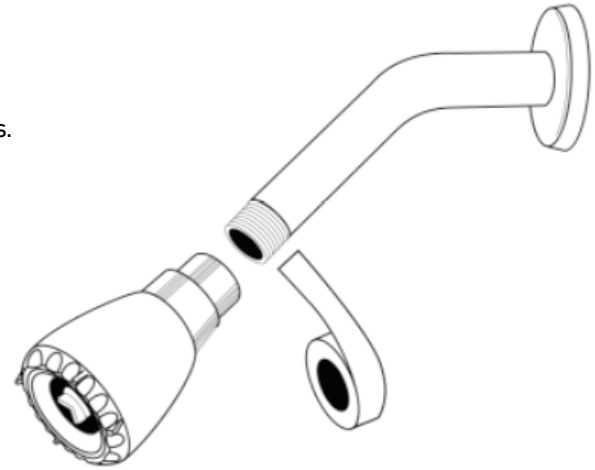

**WARRANTY:** This water saving product is warranted to be free from defects in workmanship and material for 1 year. If it fails to do so, Greenlite™ will send you, at its election, a replacement or equivalent. For all customer service queries, please contact our customer service team Monday-Friday at [info@greenliteusa.com](mailto:info@greenliteusa.com) or call 1-844-695-9090 from 9:00 AM to 5:00 PM (EST). This limited warranty does not cover showerheads subject to accident, neglect, abuse, misuse or acts of God. Greenlite™ is not responsible for labor charges, installation, or other consequential costs.