


Weatherization and Insulation - CLOSED-CELL POLYETHYLENE PIPE INSULATION

This easy-to-install solution improves thermal efficiency in both residential and commercial hot water pipes. By reducing heat loss, it can raise water temperature by 2°F-4°F, saving you energy and money. Plus, its flexible design and pre-slit feature make installation a breeze.

PRODUCT SPECIFICATIONS

Material	Closed-cell polyethylene
Color	Charcoal
R-Value	≥ 3.3
Density	Low
Temp. Range	-90.4°F to 179°F (-68°C to 82°C)
Flame Retardancy	< 100mm/min
Warranty	1 year when used indoors or when properly covered and protected from direct sunlight.

DETAILED DIMENSIONS

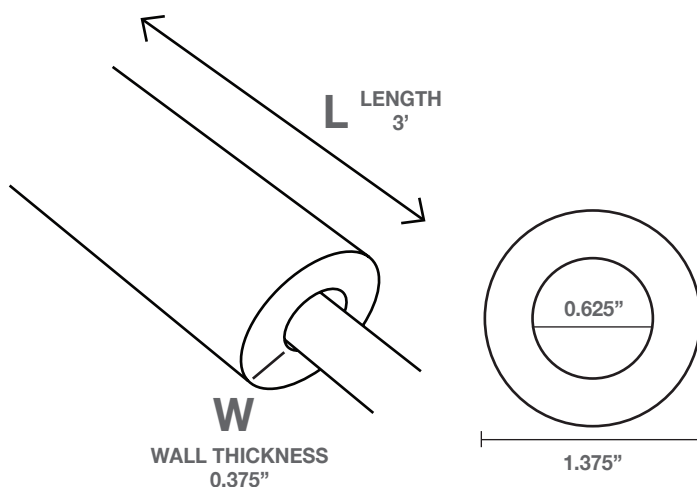

FITS

0.50" Copper Pipe
0.375" PVC Pipe
0.375" Iron Pipe

FEATURES

- Pre-slit for easy installation
- Best for indoor applications such as radiant heat
- Reduces heat loss and freezing
- Reduces condensation and plumbing noise

MODEL INFORMATION

MODEL NUMBER	PACK SIZE	CASE QTY
WX/PI-1/2-3F/4	4 TUBES @3'/EACH	24

1-877-255-0004 | info@greenliteusa.com
www.greenliteusa.com

V1 - 20250123

