



Water Conservation - WATER FLOW REGULATOR

Pressure-compensating shower flow regulator designed for utility programs, providing consistent flow from 20–80 psi with tool-free installation, broad fixture compatibility (9–14.2 mm), and color-coded flow options from 1.0 to 2.0 GPM for easy program standardization.

PRODUCT SPECIFICATIONS

Operating Pressure	20 to 80 psi (pressure compensating)
Flow Rates (Color-Coded)	Blue: 1.0gpm Pink 1.2gpm Green: 1.5gpm Light Blue 1.75gpm Red 2.0gpm
Material	Flexible silicone
Installation	Tool-free, hand-tighten only
Compatibility	Tube diameters from 9 to 14.2 mm
Applications	Shower handles, bibs, and pillar taps

DETAILED DIMENSIONS

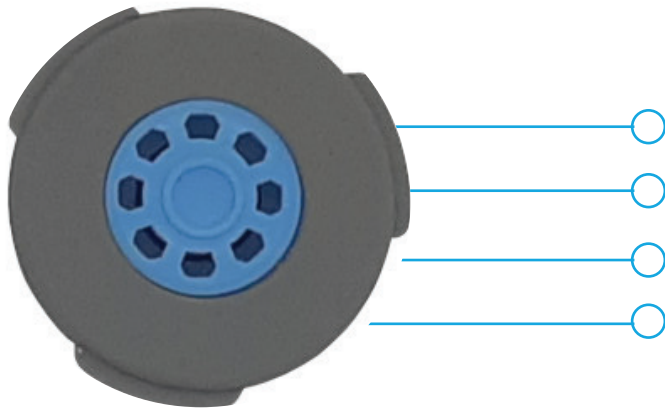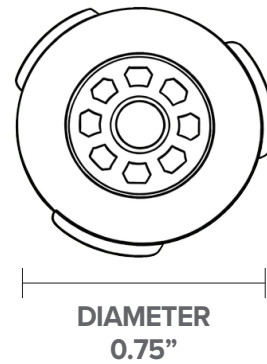

FEATURES

- Consistent, pressure-compensating flow (20-80 psi)
- Fits 9 to 14.2 mm tubes with flexible silicone adapter
- Installs easily with hand tightening only
- Perfect for shower handles, bibs, and pillar taps

MODEL INFORMATION

MODEL	CASE QTY
TBD	TBD

