



LED 6W E26 BASE 13W PL REPLACEMENT




These energy-saving LED lamps are quick, easy and safe to install into existing CFL fixtures without any extra effort or re-wiring.



- Available in 3000K and 4000K
- E26 Base
- UL Approved for Damp Locations
- UL Approved for use in Enclosed Fixtures
- 5 Year Warranty



SCREW-IN

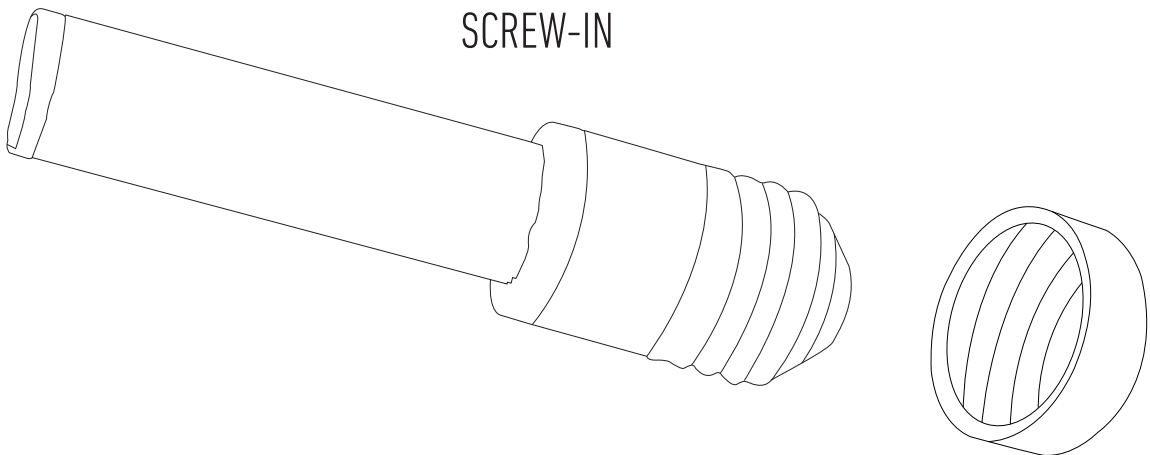



LED 6W E26 BASE 13W PL REPLACEMENT

Commercial



Hospitality



Retail



SPECIFICATIONS

40120
6W/LED/PLC/E26/30K

40134
6W/LED/PLC/E26/40K

	40120 6W/LED/PLC/E26/30K	40134 6W/LED/PLC/E26/40K
Type	LED PL REPLACEMENT	LED PL REPLACEMENT
Mount	Horizontal / Vertical	Horizontal / Vertical
Base	E26	E26
Wattage	6W	6W
CFL Equivalence	13W	13W
Voltage - Frequency	120V-277VAC	120V-277VAC
Color Temperature (ANSI)	3000K	4000K
Lumens	520	520
Efficacy (LPW)	100	100
CRI	86	86
Beam Angle	120°	120°
Dimmable	NO	NO
Rated Lifetime (hrs.)	50,000	50,000
Dia. x MOL	1.41" x 5.79"	1.41" x 5.79"
Warranty	5 Years	5 Years