



14W/SHOP/1T/E/2



LED Shoplite Fixture

IMPORTANT GENERAL SAFETY INFORMATION

READ AND FOLLOW SAFETY INSTRUCTIONS DISCONNECT POWER BEFORE INSTALLATION

To reduce the risk of personal injury or property damage from fire, electric shock, falling parts, cuts/abrasions, and other hazards, read all warnings and instructions included with and on the LED Shoplite box and all LED Shoplite labels.

THIS DEVICE IS NOT SUITABLE FOR USE WITH DIMMERS.
THIS DEVICE IS SUITABLE FOR USE IN DRY OR DAMP LOCATIONS.

WARNING:

Risk of electric shock or fire. Do not use with an extension cord near water or where water may accumulate. Keep the LED Shoplite at least 16 feet away from pools and spas. Keep the plugs and receptacles dry.

- Turn off the switch and circuit breaker before installing.
- Not intended for recessed installation.
- Use only insulated staples or plastic ties to secure the cord.
- Do not install directly over a heat source (stove, etc.)
- Installation should not be made on a radiant-heating ceiling.
- Injury to people and damage to the fixture and/or mounting surface may result if the fixture is pulled from the surface.
- To reduce the likelihood of such injury or damage, mount only on a mechanically sound surface.
- Do not alter the plug or power supply cord in any way or try to install this product in any other method besides method shown on this sheet.
- This portable luminaire has a polarized plug (one blade is wider than the other) as a feature to reduce the risk of electric shock. This plug will fit in a polarized outlet only one way. If the plug does not fit fully in the outlet, reverse the plug. If it still does not fit, contact a qualified electrician. Never use with an extension cord unless plug can be fully inserted.
- Install directly beneath a ceiling-mounted receptacle.

NOTICE:

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:
(1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Care & Cleaning

CAUTION: Disconnect the power before attempting to clean the fixture. Greenlite's LED Shoplite is manufactured from quality materials that last many years with minimum care. It is recommended to periodically clean the diffuser and the interior of the fixture using a mild, non-abrasive glass cleaner and a soft cloth. **DO NOT use solvents or cleaners containing abrasive agents.**

LIMITED WARRANTY:

This fixture is warranted to be free from defects in workmanship and material for 5 years. If it fails to do so, Greenlite™ will, at its election, provide a replacement or equivalent upon receipt of the register receipt and proof of purchase. Please visit www.greenliteusa.com to find out how to initiate a warranty claim. For all customer service queries, please contact our customer service team, Monday-Friday at info@greenliteusa.com or call 1-844-695-9090 from 9:00 AM to 5:00 PM (EST). This limited warranty does not cover fixtures subject to accident, neglect, abuse, misuse or acts of God. Replacement or refund is your sole remedy.


Please see the other side for Installation Instructions

LED Shoplite Fixture

INSTALLATION INSTRUCTIONS


 (Please see the reverse for General Safety Information)

Parts included in the package: LED luminaire X1, Screw hooks X2, Hanging chains with pothooks X2, Plastic anchors X2, Tapping screws X2, Double-sided tapes X2

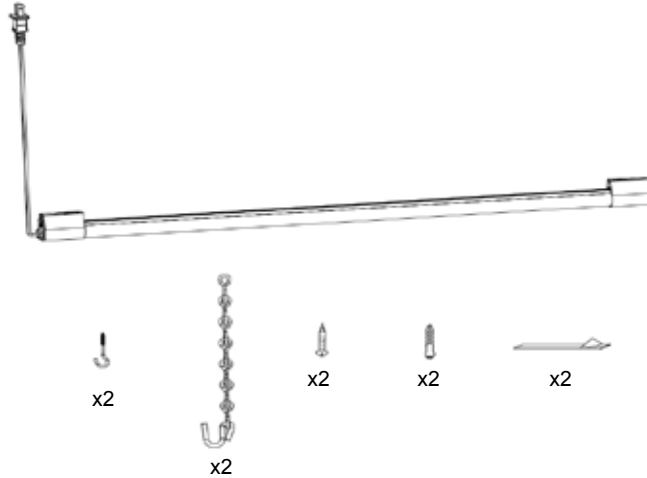

INSTALLATION OPTION 1

1. Mounting to drywall with hanging chains
Drill 1/4" holes into the ceiling.
Insert the plastic anchors then insert the screw hooks into the ceiling.

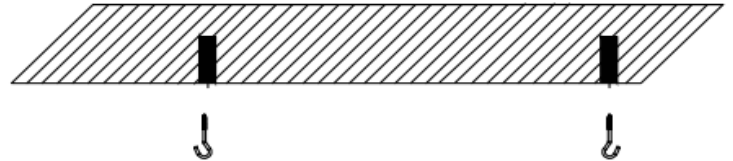

2. Put the hanging chains with pothooks into the screw hooks.



3. Insert the pothooks inside the groove of the light fixture then slide to the left to lock.




LED Shoplite Fixture

INSTALLATION OPTION 2

1. Mounting to drywall
 Drill 1/4" holes into the ceiling.
 Insert the plastic anchors then insert the tapping screws into the ceiling.



2. Insert the tapping screws inside the groove of the light fixture then slide to the left to lock.

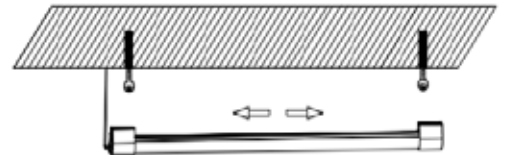

INSTALLATION OPTION 3

1. Place the double-sided tape on the LED Shoplite. Remove the backing of the double-sided tape and press lightly to install on the mounting surface.

